



# ELECTRIFYRC

- Video/Audio Wireless Transmitter Module
- Compact size module
- Highly integrated circuit
- 8 channels DIP switch selectable
- 500/1000 mW output power instant switchable
- Digital Phase-Lock-Loop circuit without temperature drifting problem
- Light aluminum case total weight only 17 gram

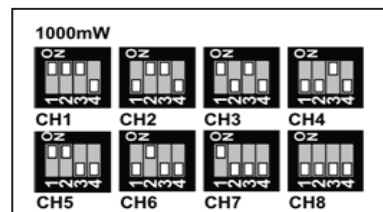

Model Name	T1013	T2400	T3300
Frequency Band	1200MHz	2400MHz	3300MHz
Available Channel	8 Ch	8 Ch	8 Ch
Audio Subcarrier	5.5MHz	6.5MHz	6.5MHz
Operating Voltage	DC12V		
Operating Current	300~350mA		
Trans. Range	0.5W: 120m / 1W: 200m (Open space)		
Transmission Power	0.5W: 27±0.5 dBm / 1W: 30±1 dBm		
Power Consumption	3.6W		
Operating Temperature	0~60°		
Operating Humidity	20~80%		
Channel Selection	Dip Switch		
Antenna Connector	SMA Connector		
Frequency Lock Method	Digital Phase Lock Loop		
Weight	17 ± 1g		
Dimension	37.5*27*12.6 mm (L*W*H)		

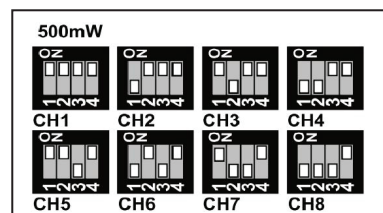

item	T1300 (A)	T2400 (A)	T3300(A) (A)	T3300(B) (B)
CH 1	1080	2410	3320	3250
CH 2	1120	2430	3345	3270
CH 3	1160	2450	3370	3290
CH 4	1200	2470	3395	3310
CH 5	1010	2370	3420	3490
CH 6	1040	2390	3445	3510
CH 7	1240	2490	3470	3530
CH 8	1280	2510	3495	3550

ElectrifyRC reserves rights, to revise or discontinue any product without prior notice.